


# LP Laboratory Finishing Padder

BENNINGER

**KUSTERS**  
Member of the Benninger Group

## Main advantages:

- Laboratory padder for resin finishing application of knitted and woven fabrics.
- Padder speed: 4.5 m/min.
- Pressure adjustable (0.1-0.6 kg/cm<sup>2</sup> = 1 - 6 bar) for different applications resulting in different pickups of finishing agents.
- Depending on pressure setting (normally 0.1 - 0.3 kg/cm<sup>2</sup> = 1 - 3 bar) and fabric specification (weight and structure), pick up is between 65 % and 85 %.
- 400 mm width and 125 mm diameter padding mangle made from NBR rubber. Solid and compact table design.
- All stainless steel design.
- Plug and play (only electrical and air connection needed). Excellent price value ratio.

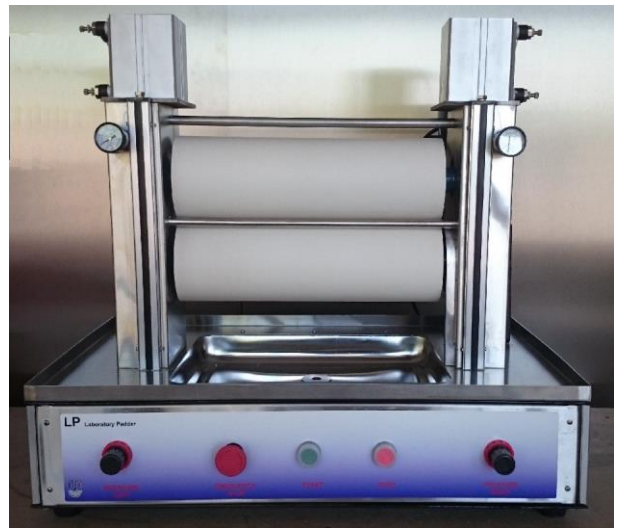

## Padding mangle specification:

Length: 400mm  
Diameter: 125mm  
Hardness: approx. 70 °Shore

## Specification:

Dimensions(WxDxH): 720x550x755mm  
Machine weight: 100 kg  
Power consumption: 250 W  
Voltage: Single phase 220V, 50Hz  
Max. ambient temperature: 60 °C

